



## INTELLIGENT FACILITY SOLUTIONS

Electric Works, 3 Concourse Way, Sheffield, S1 2BJ

United Kingdom: +44 (0) 114 354 0047

Eire: +353 190 36387

[sales@ihdryers.co.uk](mailto:sales@ihdryers.co.uk)

[www.intelligenthanddryers.com](http://www.intelligenthanddryers.com)

# Cleanflow 950ml Push Button Countertop Liquid Soap and Alcohol GEL Dispenser

RECESSED

Push-button



IFSDJT118  
Polished Chrome

### General description:


- Lavatory-mounted soap dispenser shall dispense 950ml.
- Push-button actuated.
- Model suitable for collectivities and for installation in areas with high traffic of people.
- Suitable for liquid and lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and/or Triclosan. Not supported surgical soaps.

### Components & materials:

- **IFSDJT118:** chrome-plated brass, bright finish.
- **Dispenser stem & 102 mm spout:** chrome-plated brass, bright finish, with rubber “duck bill” check valves and an O-ring seal. Vandal-resistant spout shall rotate 360° without damage to unit. Valve operation shall comply with ADA Accessibility (no more than 22.2 Newtons of pressure to actuate without grasping or twisting by operator).
- **Tank:** shall be translucent, shatter-resistant polyethylene, refillable from the top
- **Threaded shank:** shall be gray thermoplastic ABS, shatter-resistant.
- **Escutcheon:** chrome-plated brass, bright finish.
- **Valve body, internal parts, basin nut and tank adapter:** modeled plastic.
- **Spring, escutcheon washer, stem retainer collar and screw:** stainless steel.

### Technical Specifications:

Weight (empty)	0,425 Kg
Suitable soaps	Liquid and lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and/or Triclosan. Not supported surgical soaps.
Pressure pulsation	20,0 N
Capacity	0,95 L
Quantity dispensed per pump	1 ml
Escutcheon	Ø50 mm
Countertop hole	Ø25 mm
Tank height	216 mm

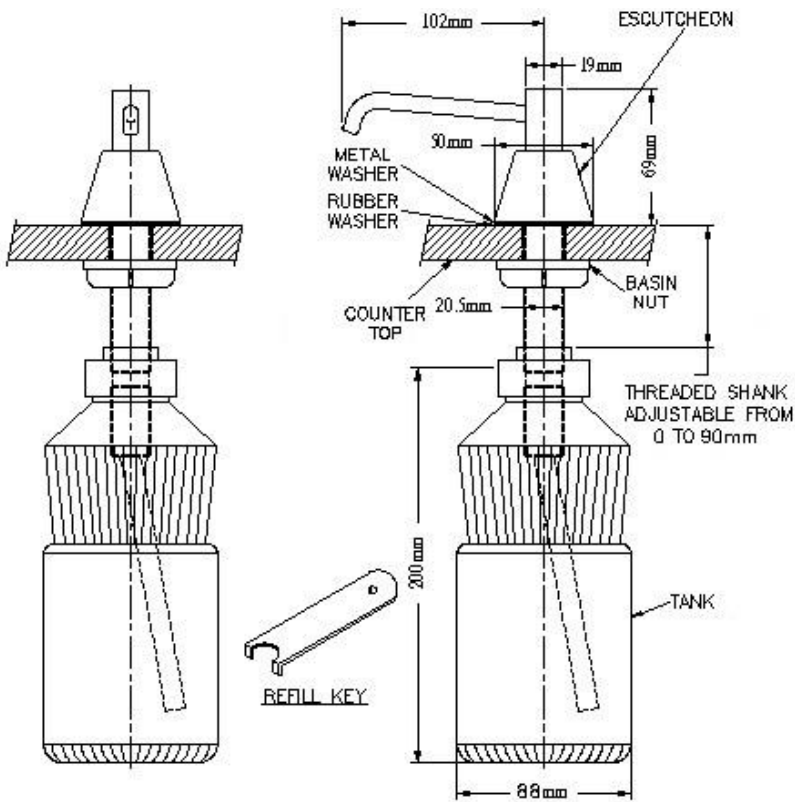

### MOUNTING TEMPLATE

Unit is typically located adjacent to a flush mounted lavatory, through Ø 22-25 mm cut out (by others) in counter top. An adjustable threaded shank allows for installation in counter tops up to 90mm high.