

Intelligent

**The trusted independent experts for hand dryers
and washrooms since 2012.**






The Ribbon Sensor Tap 2.0

TSL.R021

Deck mounted sensor operated tap with robust body construction for all types of projects. To be used in conjunction with the Ribbon dryer and soap dispenser for optimum efficiency.

Finish	Codes	LRV*
● Satin	TSL.R021.CS	51
● Black	TSL.R021.BK	3
● Brass	TSL.R021.BR	40
● Copper	TSL.R021.CP	19
● Chrome	TSL.R021.C	58

Light Reflectance Value*

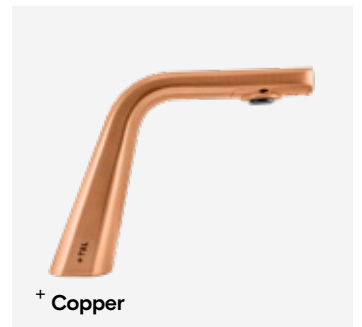

Technical Data

Minimum operating pressure	7-87 psi dynamic pressure
Flow rate	1.9 litres/minute (Other flow rates available upon request)
Weight	1.2kg
Stainless steel grade	304 Stainless steel
Sensor range	Preset 120±20mm (adjustable). Min range 50mm - Max range 150mm
Comfort delay	2 seconds
Security cut-off	60 seconds
Power supply - mains	Input: 100-240V ac; 50/60Hz Output: 6V DC; 0.5A,3W max

Installation requirements

Counter-top cut-out (dia)	Ø32mm
Maximum countertop thickness	35mm
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins, or waste outlets
Access requirements	Solenoids and transformers must be accessible at all times for servicing
Cabling	Low voltage push fit connector to tap
Power supply	For the mains power option, it is recommended that the sensors are installed on their own circuit to avoid interference from other power demands.

Compliance & certificates

ASME A112.18.1, CSA B125.1, NSF/ANSI/CAN 61,
WRAS, CE, UKCA, RoHS


Included

The Ribbon Sensor Tap 2.0
Ribbon sensor faucet head
Mains power supply
Solenoid valve
Anti-rotation plate #1
Counter top gasket
Anti-rotation plate #2
Fixing nut
Flow restrictor
Flex hose - 300mm

Warranty

1 Year limited - unlimited digital support

+ Technical drawing

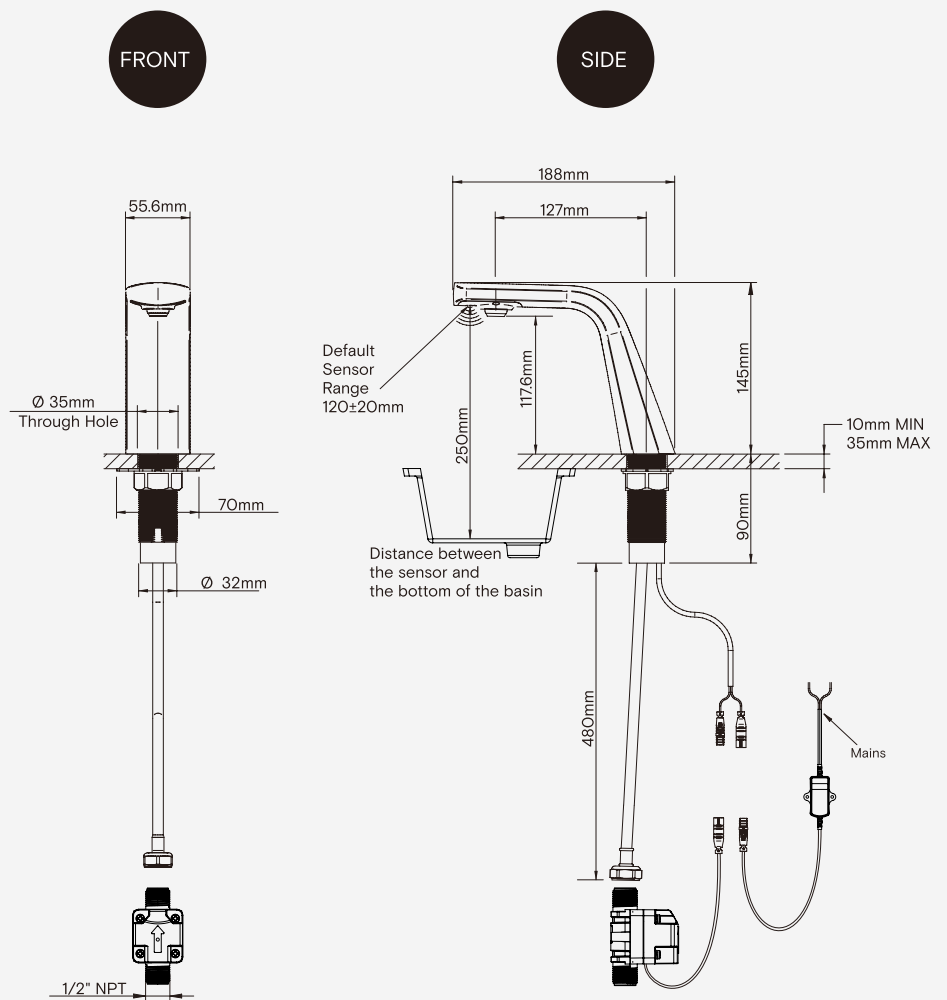

Spare parts

If a situation arises where you require replacement components outside of a maintenance contract, there may be provision to obtain spare parts. Providing the components are under warranty and the parts have become non-functioning during normal use within their assumed usable life, they may be replaced. Should a replacement mains power supply be required it is imperative that an identical type is used. Contact **The Splash Lab** for further information.

Part	Codes
Solenoid Valve	TSLP120030
Slim Aerator	TSLP230164

Related products



The Ribbon Soap Dispenser
TSL.R011



The Ribbon Hand Dryer
TSL.R031